

Design:

- Hollow taper shank in accordance with DIN 69893
- Manufactured in hardened and tempered tool steel
- Surface bright polished or nickel plated
- For the clamping of shanks in TC and steel
- For shaft tolerances h6 in accordance with EN 847-2

Application:

- Clamping of tools with shanks by means of thermal shrink-fit technology
- Very high dynamic stiffness and rigidity
- Very well suited to high rotational speed (HSC)
- Suitable for right- and left-hand running

Machine:


- CNC machining centres

Special features:

- Optimum connection between tool and mount via thermal shrink-fit technology
- High level of run-out accuracy
- Suitable for high feed rates thanks to its sturdy construction
- Very quiet running through its closed circular shape
- Slim design with few interfering contours for the most possible universal application

Application Data:

- In accordance with the tool (up to a max. 30000 rpm)
- Max transmissible torque for d =25 mm: M = 500 Nm

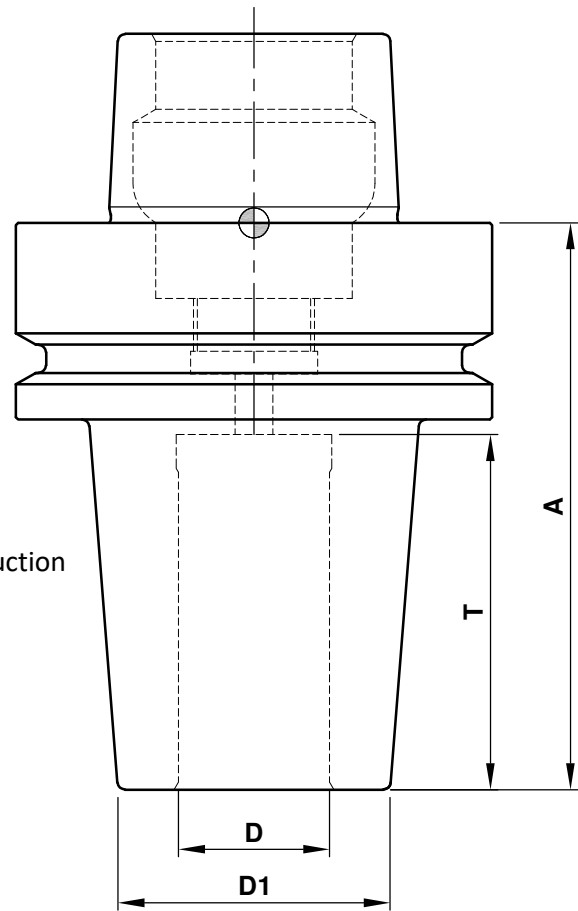

D	D1	A	T	Ident-No.
6	20	75	30	C915-0675BN
8	20	75	40	C915-0875BN
10	25	75	40	C915-1075BN
12	28	75	40	C915-1275BN
14	28	75	42	C915-1475BN
16	28	75	44	C915-1675BN
18	36	75	47	C915-1875BN
20	36	75	47	C915-2075BN
25	36	75	52	C915-2575BN
30	44	75	52	C915-3075

Aigner
WERKZEUGE

e-mail: office@aigner-werkzeuge.at
www.aigner-werkzeuge.at

Blattformat: **A4** All dimensions in mm

Zchnng.-Nr. KW.49150.4 02

C915