


TC-Through-Hole-Borer

C275

Cutting Material
TC

Number of Teeth
Z 2



Design:

- TC permanently fitted with a V-shaped point and double bevel
- Without back guide (guide bevel)
- for tool Ø3 + Ø4 spiral part in soid TC, with a V-shaped point in full angle 60° and with back guide

Application:

- Production of through holes

Workpiece material:

- Solid wood and panel materials

Machine:


- Through-feed boring machines, machining centres and special boring machines

Scope of supply:


- Borer assembled with length setting screw Grub screw ISO 7434
- Setting screw special design for Weeke quick-action borer chucks optionally available

Special features:

- Production of tear-free through holes

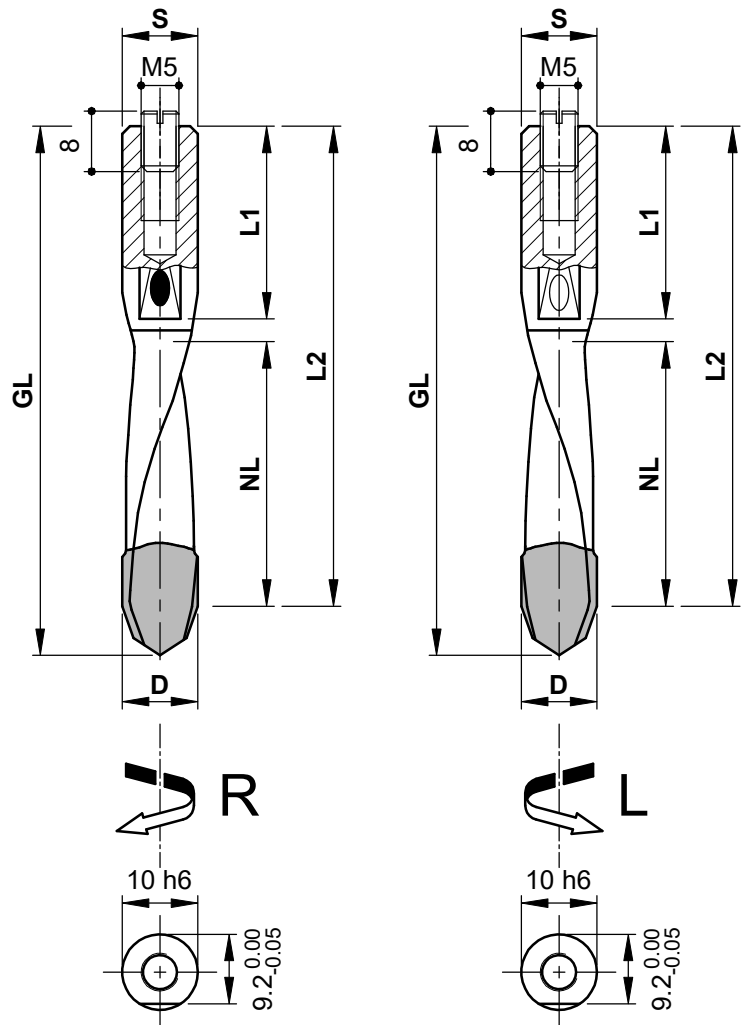

optionally



D	NL	GL	L1	L2	S	Z	R/L	DZ	Ident-No.
3	22.5	70	27	68	10	2	R	3000-9000	C275-03700R
3	22.5	70	27	68	10	2	L	3000-9000	C275-03700L
4	35	70	27	67	10	2	R	3000-9000	C275-04700R
4	35	70	27	67	10	2	L	3000-9000	C275-04700L
4.5	35	70	27	67	10	2	R	3000-9000	C275-04570R
4.5	35	70	27	67	10	2	L	3000-9000	C275-04570L
5	35	70	27	66	10	2	R	3000-9000	C275-05700R
5	35	70	27	66	10	2	L	3000-9000	C275-05700L
6	35	70	27	65	10	2	R	3000-9000	C275-06700R
6	35	70	27	65	10	2	L	3000-9000	C275-06700L
8	35	70	27	64	10	2	R	3000-9000	C275-08700R
8	35	70	27	64	10	2	L	3000-9000	C275-08700L
10	35	70	25.5	63.8	10	2	R	3000-9000	C275-10700R
10	35	70	25.5	63.8	10	2	L	3000-9000	C275-10700L
12	35	70	25	63.5	10	2	R	3000-9000	C275-12700R
12	35	70	25	63.5	10	2	L	3000-9000	C275-12700L

Spare Parts

Description	Qty.	Dimensions	MBM	Ident-No.
Length Setting Screw Grub, Screw ISO 7434	1	M5x8	10	KW.45451.5
Setting Screw Special Design	1	M5x17	1	KW.44890.5

Aigner
WERKZEUGE
e-mail:office@aigner-werkzeuge.at
www.aigner-werkzeuge.at

Z.....No. of teeth
DZ.....Speed Range (rpm)
MBM.....Minimum Order Quantity

Blattformat: **A4** All dimensions in mm
Zchnng.-Nr. KW.42750.4 | 02

C275-GL70