

DP-Grooving Cutter for Releasable Furniture Connectors C316-1

Cutting Material

DP


Number of
Teeth

Z 3

Feed

MEC

Bonded



Design:

- Tool body in tempered steel
- Optionally assembled on cutter arbor C277-E
- Can be re-sharpened 1 time
- Bolt circle C276-E05 = right hand rotation

Application:

- Optimized for milling grooves for Clamex-P, Tenso-P, Divario P connections

Workpiece Material:

- Solid wood and panel materials


Machine:

- CNC machining centres



Scope of Supply:

- C316-1-30 prepared for mounting on arbor C277-E
- C316-1-30-02 on arbor C277-E
- Arbor C277-E principally with a length setting screw
For use with shrink chucks HSK-F 63 (C915)
without a length setting screw
- C316-1-30-02 also optionally assembled (and balanced) (MS):
Assembled in shrink chuck HSK-F 63 (C915): C316-....-M1
Assembled in collet chuck HSK-F 63 (C910): C316-....-M2

1. type of operation

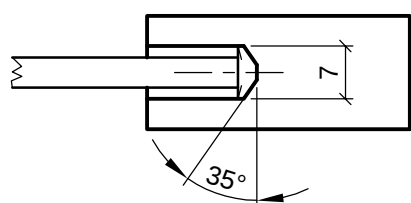

2.+3. type of operation

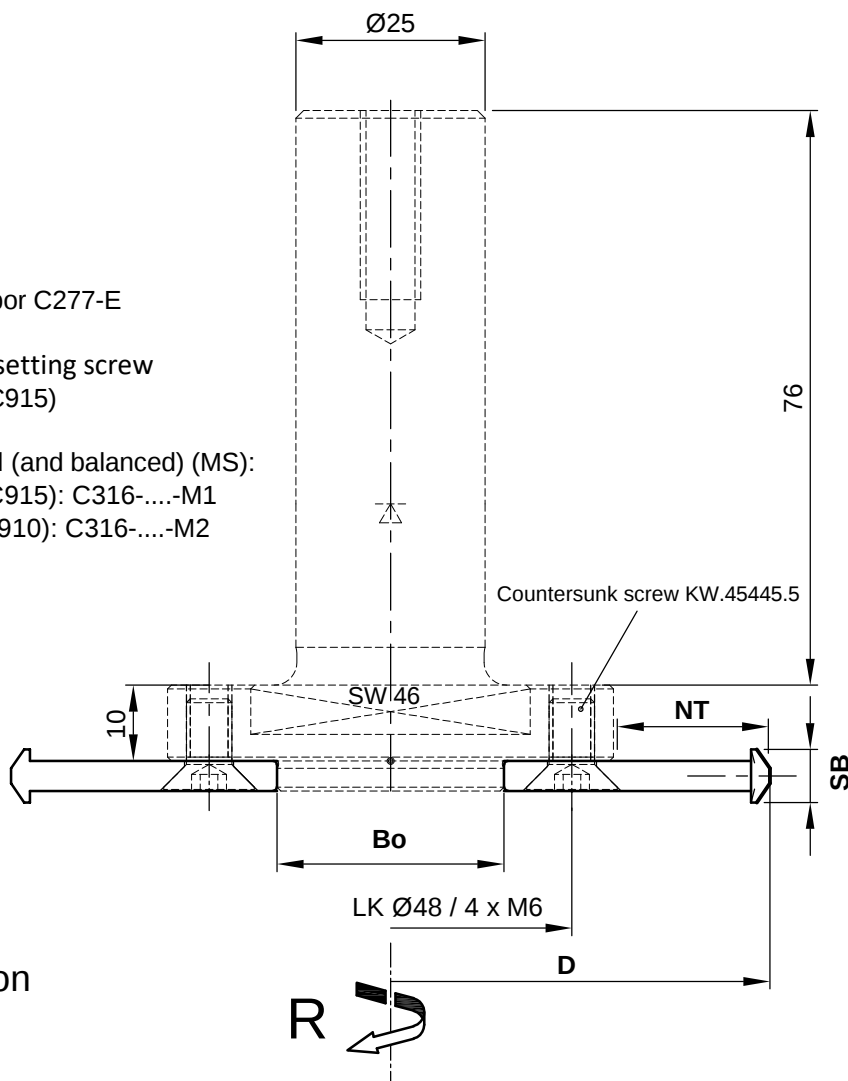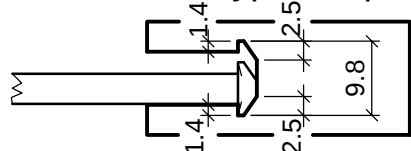

D	SB	NT	Bo	Z	R/L	MS	n max.	Ident-No.
100.4	7.0	20	30	3	R		13300	C316-1-30
100.4	7.0	20	30	3	R	S25	13300	C316-1-30-02
100.4	7.0	20	30	3	R	M1	13300	C316-1-30-02-M1
100.4	7.0	20	30	3	R	M2	13300	C316-1-30-02-M2

Aigner
WERKZEUGE

e-mail: office@aigner-werkzeuge.at
www.aigner-werkzeuge.at

MS.....Machine Adaptor

Z.....No. of teeth

n max.....Max. Speed (rpm)

Blattformat: **A4** All dimensions in mm

Zchnng.-Nr. KW.43161.4 00

C316-1