

Design:

- Hollow taper shank in Weinig-Design
- Manufactured in hardened and tempered tool steel
- Surface bright polished
- For bore tolerances H6
- Cutter tightening bolt with double thread

Application:


- Clamping of drilling tools with bores of 40 mm (only in connection by screwing and pinning the tools (Anti-twist protection))
- Observe the weight and diameter specifications of the manufacturer and the maximum permissible rotational speeds
- Suitable for right- and left-hand running

Machine:


- Weinig Powermat - moulding machines with Powerlock system

Scope of Supply:

- Cutter arbor
- Cutter tightening bolt

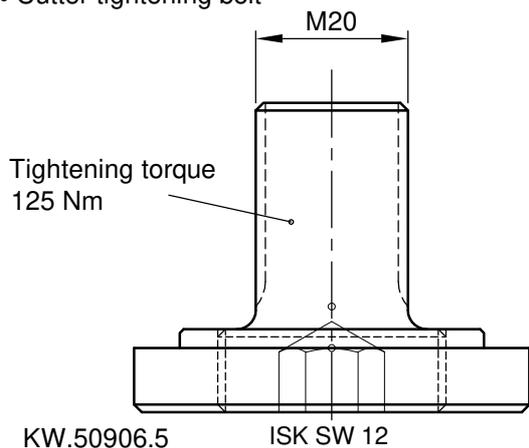

Cutter Tightening Bolt

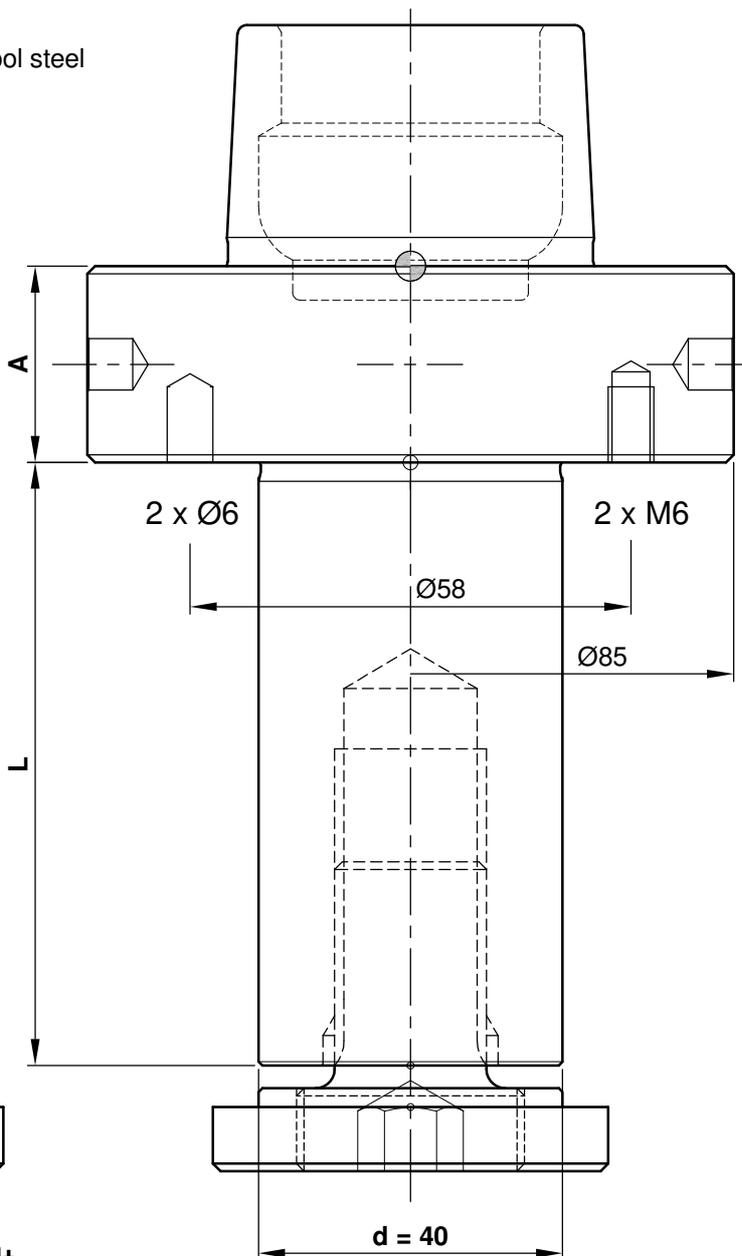

A	d	L	ME	n max.	Ident-No.
26	40	80	2.0	24000	C960-4080
26	40	100	2.1	24000	C960-40100
26	40	130	2.4	24000	C960-40130
26	40	140	2.6	24000	C960-40140
26	40	170	2.8	24000	C960-40170
26	40	180	2.9	24000	C960-40180
26	40	240	3.5	24000	C960-40240

Spare Parts

Description	Qty.	Dimensions	MBM	Ident-No.
Cutter tightening bolt	1	M20x41	1	KW.50906.5

Aigner
WERKZEUGE
e-mail:office@aigner-werkzeuge.at
www.aigner-werkzeuge.at

ME.....Mass (kg)
n max.....Max Speed (rpm)
MBM.....Minimum Order Quantity

Blattformat: **A4** All dimensions in mm
Zchnng.-Nr. KW.49600.4 | 02

C960